

S3226E/4726E/4732E

ELECTRIC SLAB SCISSOR LIFTS



- Self-propelled electric scissor lifts
- Compact & robust
- Roll-out extension decks for extra reach
- Suitable for indoor and outdoor use
- Ideal for construction & maintenance applications

snorkel
www.snorkellifts.com

SLAB SCISSOR LIFTS

S3226E/4726E/4732E



| DIMENSIONS | S3226E | S4726E | S4732E |
|---------------------------------|----------------|------------------|------------------|
| Max. working height | 32 ft | 32 ft | 38 ft |
| Max. platform height (A) | 26 ft | 26 ft | 32 ft |
| Platform size (stowed) | 86 in x 26 in | 86 in x 41.5 in | 86 in x 41.5 in |
| Platform size (extended) | 134 in x 26 in | 134 in x 41.5 in | 134 in x 41.5 in |
| Deck extension length (B) | 48 in | 48 in | 48 in |
| Overall length (D) | 89 in | 89 in | 89 in |
| Overall width (C) | 32 in | 47 in | 47 in |
| Stowed height (E) | 90.5 in | 90.5 in | 95 in |
| Min. height (guardrails folded) | 73 in | 73 in | 76.5 in |
| Ground clearance (stowed) | 3 in | 3 in | 3 in |
| Ground clearance (elevated) | 0.75 in | 0.75 in | 0.75 in |

| PERFORMANCE | | | |
|-----------------------------|---------------------------------|---------------------------------|---------------------------------|
| Platform capacity | 500 lbs | 1,000 lbs | 700 lbs |
| Max. drive height | 26 ft | 26 ft | 32 ft |
| Max. drive speed (elevated) | 0.4 mph | 0.4 mph | 0.4 mph |
| Max. drive speed (stowed) | 2.0 mph | 2.0 mph | 2.0 mph |
| Gradeability | 25% | 25% | 25% |
| Inside turning radius | 7 in | 10 in | 10 in |
| Outside turning radius | 87 in | 91 in | 91 in |
| Tires | 15 in x 4 in non-marking rubber | 15 in x 5 in non-marking rubber | 15 in x 5 in non-marking rubber |
| Controls | proportional | proportional | proportional |
| Drive system | 2 wheel drive | 2 wheel drive | 2 wheel drive |

| POWER | | | |
|--------------|--|------------------------------|--|
| Power source | | 4 x 6V 240amp hour batteries | |
| Charger | | 90-240V 25amp | |

| WEIGHT | | | |
|--------|------------|------------|-----------|
| Weight | 4,500 lbs* | 4,400 lbs* | 5,550 lbs |

TURNING RADIUS

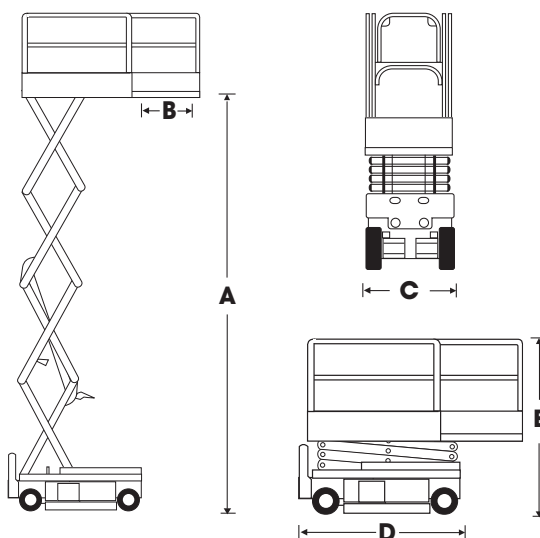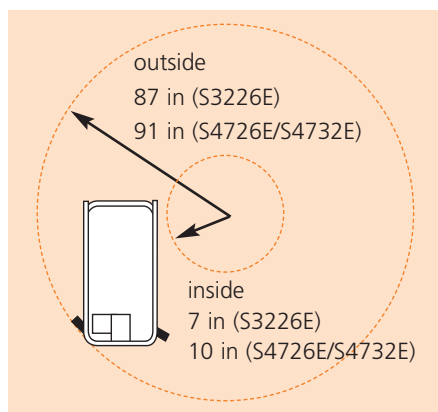

STANDARD FEATURES

- Roll-out deck extension with dual trigger locks
- Non-marking tires
- Swing-out service trays
- Saloon door entry
- Key switch
- 2 persons + equipment capacity indoors
- 1 person + equipment capacity outdoors
- Proportional controls
- Power line to platform
- Hour meter & onboard diagnostics display
- Dual lanyard attachments points
- Operators manual
- 1 year parts & labor, 5 years structural warranty
- ANSI compliant

OPTIONS

- Special paint colors
- Flashing amber light
- 110V AC 800W inverter
- Environmental (green) oil
- CSA compliant

snorkel www.snorkellifts.com

P.O. Box 1160
 St. Joseph, MO 64502-1160, USA
 Tel: 1 (785) 989-3000
 Toll-free: 1 (800) 255-0317
 Fax: 1 (785) 989-3070
 Email: sales.usa@snorkellifts.com